

## **Mid-Frequency Sonar Interactions with Beaked Whales**

PI Kenneth G. Foote

Woods Hole Oceanographic Institution, 98 Water Street, Woods Hole, MA 02543

Phone: (508) 289-2445 FAX: (508) 457-2194 E-mail: [kfoote@whoi.edu](mailto:kfoote@whoi.edu)

Co-PI Gonzalo R. Feijoo

Woods Hole Oceanographic Institution, 98 Water Street, Woods Hole, MA 02543

Phone: (508) 289-3694 FAX: (508) 457-2194 E-mail: [gfeijoo@whoi.edu](mailto:gfeijoo@whoi.edu)

Co-PI Kent Rye

Naval Surface Warfare Center, Carderock Division, 9500 MacArthur Boulevard,  
West Bethesda, MD 20817-5700

Phone: (301) 227-1449 FAX: (301) 227-5702 E-mail: [Kent.Rye@navy.mil](mailto:Kent.Rye@navy.mil)

Co-PI Joy Reidenberg

Mount Sinai School of Medicine, Center for Anatomy and Functional Morphology,  
Mail Box 1007, 1 Gustave L. Levy Place, New York, NY 10029-6574

Phone: (212) 241-7563 FAX: (212) 860-1174 E-mail: [joy.reidenberg@mssm.edu](mailto:joy.reidenberg@mssm.edu)

Co-PI Mardi Hastings

Pennsylvania State University, Applied Research Laboratory, Washington DC Area Office,  
801 N. Quincy St., Suite 120, Arlington, VA 22203-1708

Phone: (703) 312-6993 FAX: (703) 312-0095 E-mail: [mch26@psu.edu](mailto:mch26@psu.edu)

Award Number: *ONR Award no. N000140710992*

### **LONG-TERM GOALS**

The top-level goal of this project is to build an interactive online modeling and visualization system, called the Virtual Beaked Whale, to enable users to predict mid-frequency sonar-induced acoustic fields inside beaked whales and other marine mammals. Another high-level goal is to acquire new high-resolution morphometric and physical-property data on beaked whales for use in the model. It is hoped that the availability of such a system, together with high-quality data, will give researchers insight into the nature of sonar interactions with beaked whales, and may prove useful in evaluating alternate sonar transmit signals that retain the required information content but with less effect.

### **OBJECTIVES**

To achieve the long-term goals, a number of scientific and technological objectives have been identified. These include extending existing finite-element-method (FEM) code to describe acoustic interactions with structures, and applying this to a virtual beaked whale and mid-sonar frequencies in the range 1-10 kHz; collecting high-resolution morphometric data through computerized tomography (CT) scans on marine mammal carcasses, and constructing finite-element models of the anatomy; assigning physical properties of tissues; benchmarking the finite-element code; and incorporating the extended finite-element code and morphometric and physical-property data in an online modeling and visualization system called the Virtual Beaked Whale.

## **APPROACH AND WORK PLAN**

The approach and work plan follow an integrated set of six tasks, which are briefly described.

Task 1. Development of a finite-element method to model acoustic interactions: This can be considered as a structural-acoustic problem, where most tissue groups and surrounding water behave as acoustic fluids and bony tissues behave as elastic solids. In the modeling, the beaked whale is a structure represented by its morphometry (Task 2), where each anatomical part is assigned its own set of physical properties (Task 3). This work is being performed by Co-PI Feijoo.

Task 2. Morphometry and meshing the three-dimensional anatomy: These data will be acquired principally from CT scans performed at the WHOI Computerized Scanning and Imaging (CSI) Facility. Image data on cetacean specimens will be expressed in Digital Imaging and Communications in Medicine (DICOM) format. Amira visualization software will be used for segmentation and surface reconstruction. Automatic mesh generation will employ tetrahedral elements. CT data will be provided by WHOI Senior Scientist D. Ketten. Co-PI Reidenberg will be responsible for interpreting the anatomical data. Co-PI Feijoo will construct finite-element meshes from the anatomical data.

Task 3. Physical properties of tissues: The best available data will be used to represent the acoustically important properties of mass density, elastic constants, and absorption coefficients for each identified internal organ or other body part. This task will be led by the PI, with potential contributions of new *in vivo* data from P. Rogers at the Georgia Institute of Technology.

Task 4. Measuring interactions of acoustic fields with cetacean carcasses: In order to test the FEM code (Task 1), measurements will be performed of the internal pressure fields in instrumented marine mammal carcasses. Carcasses will be prepared by surgically implanting acoustic sensors; CT-scanned to determine sensor location and morphometry; then acoustically measured at NSWC. D. Ketten will perform the surgery and CT-scanning. Co-PI Rye will lead the measurement work at NSWC.

Task 5. Testing the FEM model: Rigorous testing will be performed by comparison with analytic solutions for immersed simple objects.

Task 6. Virtual Beaked Whale: This interactive online modeling and visualization system is the principal deliverable of the project. It incorporates a database with sets of whole-body morphometric data (Task 2) from beaked whales and other species, as well as the respective physical properties of tissues (Task 3). The output will consist of computed solutions for the internal pressure and displacement fields (Task 1). The user interface is being recommended by Co-PI Hastings. Co-PI Feijoo will direct programmers in design and implementation sub-tasks. Co-PI Hastings will also perform testing and quality assurance. The PI will coordinate the various sub-tasks.

## **WORK COMPLETED**

Task 1: The present code development is particularly noteworthy for addressing two essential, intricate computational problems. One concerns the construction of software capable of efficiently solving structural acoustic problems with millions of degrees of freedom. This is required to solve problems involving acoustic interactions with heterogeneous structures and generic interfaces, e.g., marine mammals in their natural state of immersion. The associated FEM code, generically called the finite-element solver, can now solve general structural-acoustic problems. This has incorporated earlier

work implementing a perfectly matching layer, realizing acoustic and elastic elements and interface elements to transfer loads between these, and implementing a ten-node tetrahedral element for quadratic interpolation of the basic fields.

Task 2: The second essential and intricate computational problem that is being addressed concerns the creation of finite-element models that conform to tissue interfaces. This requires the use of unstructured meshes as opposed to rectangular, Cartesian grids. CT images are being segmented; surfaces between different, contiguous tissues are being triangulated; and the encapsulated volumes are being filled with volumetric elements, which are tetrahedral and geometrically constrained for the sake of computational accuracy and efficiency. Three-dimensional visualizations and/or meshes have been prepared for each of three common dolphins, designated D-del40, D-del42, and D-del52. The carcass of D-del52 was used in the experiment described under Task 4. In addition, visualizations and meshes are being prepared for a minke whale head, in anticipation of modeling a virtual beaked whale.

Task 3: The subject of physical properties of marine mammal tissue has been discussed extensively by the Co-PIs, with important contributions and insights offered by D. Ketten and P. Rogers. Current knowledge of physical properties is mostly derived from *ex situ* measurements rather than the more desirable *in vivo* measurements. It is also appreciated that the physical properties of some tissues are influenced by pressure, e.g., the lungs and other air-containing tissues, while the physical properties of some other tissues are influenced by both pressure and temperature, as in the case of the melon.

Task 4: A series of tests were performed in 2008 on tourmaline pressure sensors in a small laboratory tank and when embedded in a 30-kg pig carcass immersed in the NSWC Carderock Division Blast Pond. The usability of such sensors for measurement of internal pressure fields in ensonified mammalian carcasses was thus established. During the period 2-4 February 2009, the first experiment with a marine mammal carcass was performed at NSWC Carderock Division. The carcass was that of a young adult male common dolphin (*Delphinus delphis*), 119 kg, 211 cm total length, that had stranded and died on a Cape Cod beach two months previously. In the interim the carcass, designated D-del52, was stored at WHOI in a freezer at -20°C. CT scans were obtained in the frozen state and following thawing. Tourmaline pressure sensors were surgically implanted in the blowhole, left lung, right lung, external right lung, melon, along right ear, epaxial muscle near the dorsal fin, and rectal abdomen. CT scans were repeated to determine the precise anatomical locations of the eight sensors. The carcass was transported in a chilled state to NSWC by car. On 4 February the carcass was suspended within a PVC-pipe frame and immersed in the fresh water Blast Pond. It was exposed to multiple ensonifications by a single ITC-1032 spherical transducer. This was excited at each of three frequencies: 5, 7, and 10 kHz, by a 20-cycle sinusoidal burst, for each of three source locations: in front of the rostrum, and successively on the right and left sides of the carcass, but with different fore-aft and up-down locations. Data were recorded simultaneously on 15 channels from six external sensors, eight implanted sensors, and source transducer, over a total of 5 s for each frequency and source location, with 4-Hz pulse repetition frequency. Each signal was digitized at 100 kHz. Noise data were also collected passively at the end of each series without source excitation. After the experiment, the carcass was removed from the suspension frame and transported by car to the Walter Reed Army Institute for Research (WRAIR), where a necropsy was performed, led by Dr. D. R. Ketten. The acoustic data have been comprehensively reviewed within the MATLAB environment. Prominent noise at 60 Hz and sub-hertz frequencies, which is necessarily non-stationary owing to the short, 5-s data collection periods, has been removed by digital bandpass filtering with a 10% bandwidth. Qualitative conclusions are currently being supplemented by a detailed quantitative analysis, with enhanced processing by matched filtering.

Task 5: FEM solutions are being compared with analytic solutions for scattering or internal fields for both fluid and solid elastic spherical and cylindrical bodies and shells. Analytic solutions for the acoustic interaction of both plane and spherical acoustic waves in an absorbing fluid sphere immersed in a lossy immersion fluid have been developed and rendered in code for use in validating the FEM code. These solutions have been realized numerically for a 50-mm-diameter sphere for a range of conditions of mass density, sound speed, and absorption coefficients for wavenumber-radius products equal to  $\pi/3$  and  $10\pi/3$ , where significant and complicated interaction effects are observed.

Task 6: Visualization routines have been developed to return data from the FEM system and display these on a webpage. This system is operational in a pilot mode and is being used internally. Significant achievements include specification of the sonar frequency and direction of the incident plane wave, development of a client-server system that displays the computational results in the form of pressure fields in user-defined cross sections of the computational domain. The client-server system is responsible for passing data among the different components of the simulation environment, namely meshing, preprocessing, and FEM-analysis programs. The visualization system is presently based in MATLAB, and is capable of operating with meshes of up to two million elements. A new, successor system will be capable of operating with meshes containing more than 20 million elements. A user group composed of colleagues from the international bioacoustics community is being defined for testing the Virtual Beak Whale when in a more advanced state.

## **RESULTS**

Construction of a finite-element mesh is illustrated in Fig. 1 for a common dolphin. The three-dimensional surface rendering of the lower respiratory tract of the same specimen has earlier been interpreted and delineated. The common dolphin carcass with implanted tourmaline sensors, measured during the experiment on 4 February 2009, is shown in Fig. 2. An overview of the acoustic data collected during this experiment for a particular source configuration and transmit signal is shown in Fig. 3. These results are indicative of the qualitative findings of signals being registered in the blowhole, epaxial muscle near the dorsal fin, melon, and right lung. Several benchmark solutions have been developed and applied in testing the FEM code.

## **IMPACT AND APPLICATIONS**

### **National Security**

At present, Navy operations at sea can be affected by the presence of marine mammals, hindering the use of sonar. The Virtual Beaked Whale will enable researchers to gauge the physical effects of particular sonar transmit signals on interactions with marine mammals.

### **Economic Development**

Sonars, including echo sounders, are manufactured in the U.S. and in a number of other countries. Use of the Virtual Beaked Whale may suggest the value of using alternate transmit signal waveforms to mitigate possible harmful effects on marine mammals and other animals.

## **Quality of Life**

An important tool in the assessment and management of fish stocks and ecosystems is acoustics. Safe operation of sonars and other active acoustic devices used in this work is essential. The Virtual Beaked Whale is expected to contribute to the process of ensuring safe acoustic operations.

## **Science Education and Communication**

The new tool, the Virtual Beaked Whale, will be interactive. It is expected that the cumulative experience of users will contribute to new knowledge about acoustic interactions with marine mammals and other forms of aquatic life, also increasing public confidence in the value of data-based technology. The tool may be used by educators to promote education in fields as diverse as aquatic science, ecosystem assessment, resource conservation, and sonar engineering.

## **RELATED PROJECTS**


This project may benefit directly from a number of other projects. Three are cited. (1) Professor P. Rogers at Georgia Institute of Technology is currently investigating methods for determining elastic properties of cetacean head tissues *in vivo* under a grant from ONR. Discussions are underway with Rogers about measuring the properties of marine mammal tissues at the WHOI CSI Facility. (2) Dr. S. Ridgway of the U.S. Navy Marine Mammal Program and Dr. D. Houser of Biomimetica have provided morphometric data on a living bottlenose dolphin. (3) The Center for Ocean Sciences Education Excellence - New England (COSEE-NE) will be assisting the NOPP project in tailoring the interactive online tools under development to specific audiences. It will also be assisting in the dissemination of the results of the research and new educational tools.

## **REFERENCES**


- V. C. Anderson, "Sound scattering from a fluid sphere," J. Acoust. Soc. Am., 22, 426-431 (1950)
- J. J. Faran, Jr., "Sound scattering by solid cylinders and spheres," J. Acoust. Soc. Am., 23, 405-418 (1951)
- K. G. Foote, "Interaction of an inhomogeneous acoustic plane wave with a fluid sphere: Analytical solution," J. Acoust. Soc. Am., 121, 3040 (2007a) (A)

## **PUBLICATIONS**


- G. Feijoo and K. G. Foote, "An acoustic finite-element model to study sonar interactions with marine mammals," J. Acoust. Soc. Am., 124, 2466 (2008) (A)
- K. G. Foote, "Internal field in an immersed, absorbing fluid sphere excited by a plane acoustic wave," J. Acoust. Soc. Am., 122, 3033-3034 (2007b) (A)
- K. G. Foote and D. T. I. Francis, "Pressure and displacement fields inside an absorbing fluid sphere ensonified by a plane harmonic wave," J. Acoust. Soc. Am., 124, 2517 (2008) (A)
- K. G. Foote, D. T. I. Francis, and M. Zampolli, "Pressure and displacement fields inside an absorbing fluid sphere ensonified by a point acoustic source: comparison of analytic and numerical solutions," J. Acoust. Soc. Am., 126, 2244 (2009) (A)

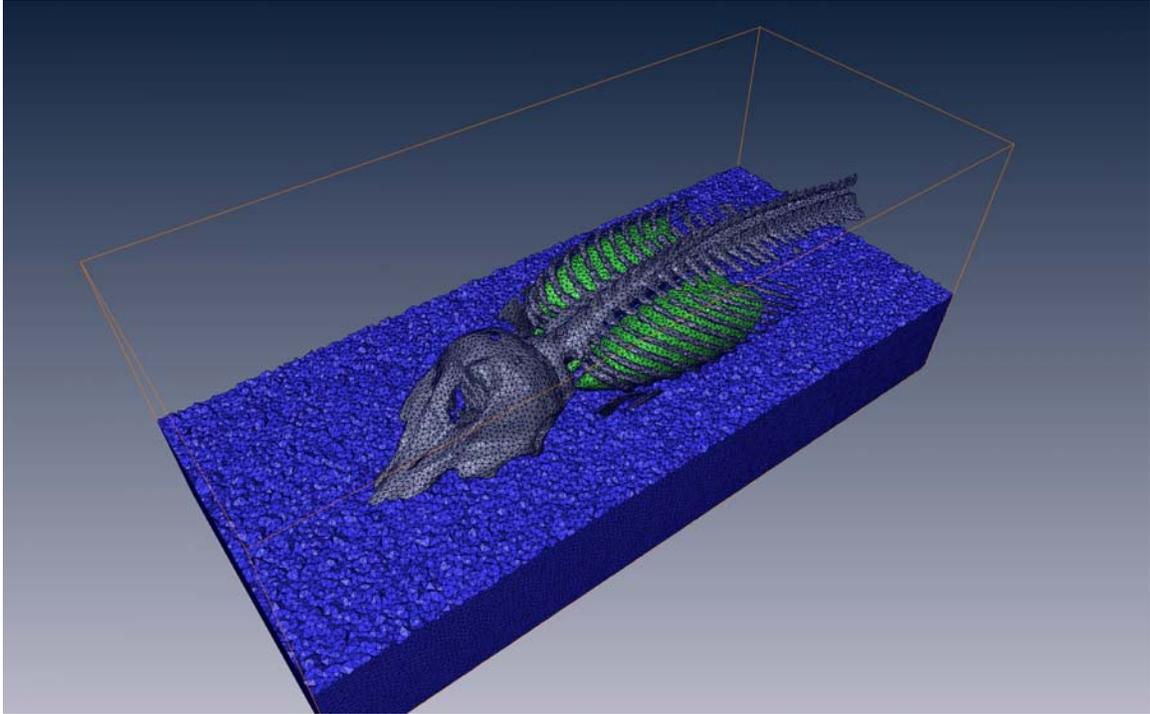

*Fig. 1. Finite-element representation with tetraheda of a 142-cm-long common dolphin and external, computational volume, in two views. The skeleton is indicated in gray and the lungs in green. Credit: G. Feijoo.*

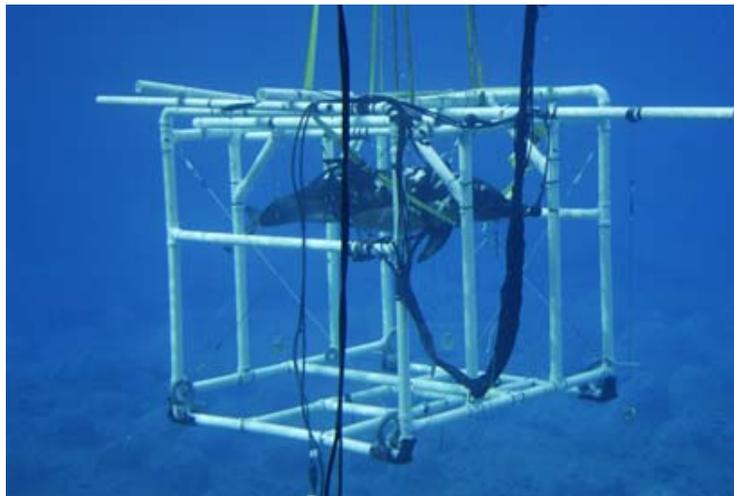

*Fig. 2. Carcass of a common dolphin, 211 cm, 119 kg, following implantation of tourmaline sensors at the WHOI CSI Facility, suspended from a PVC-pipe frame, and immersed in the NSWC Carderock Division Blast Pond for acoustic measurement on 4 February 2009. Credit: D. Ketten, S. Cramer, K. Rye, W. H. Lewis, M. Hastings, K. Foote.*

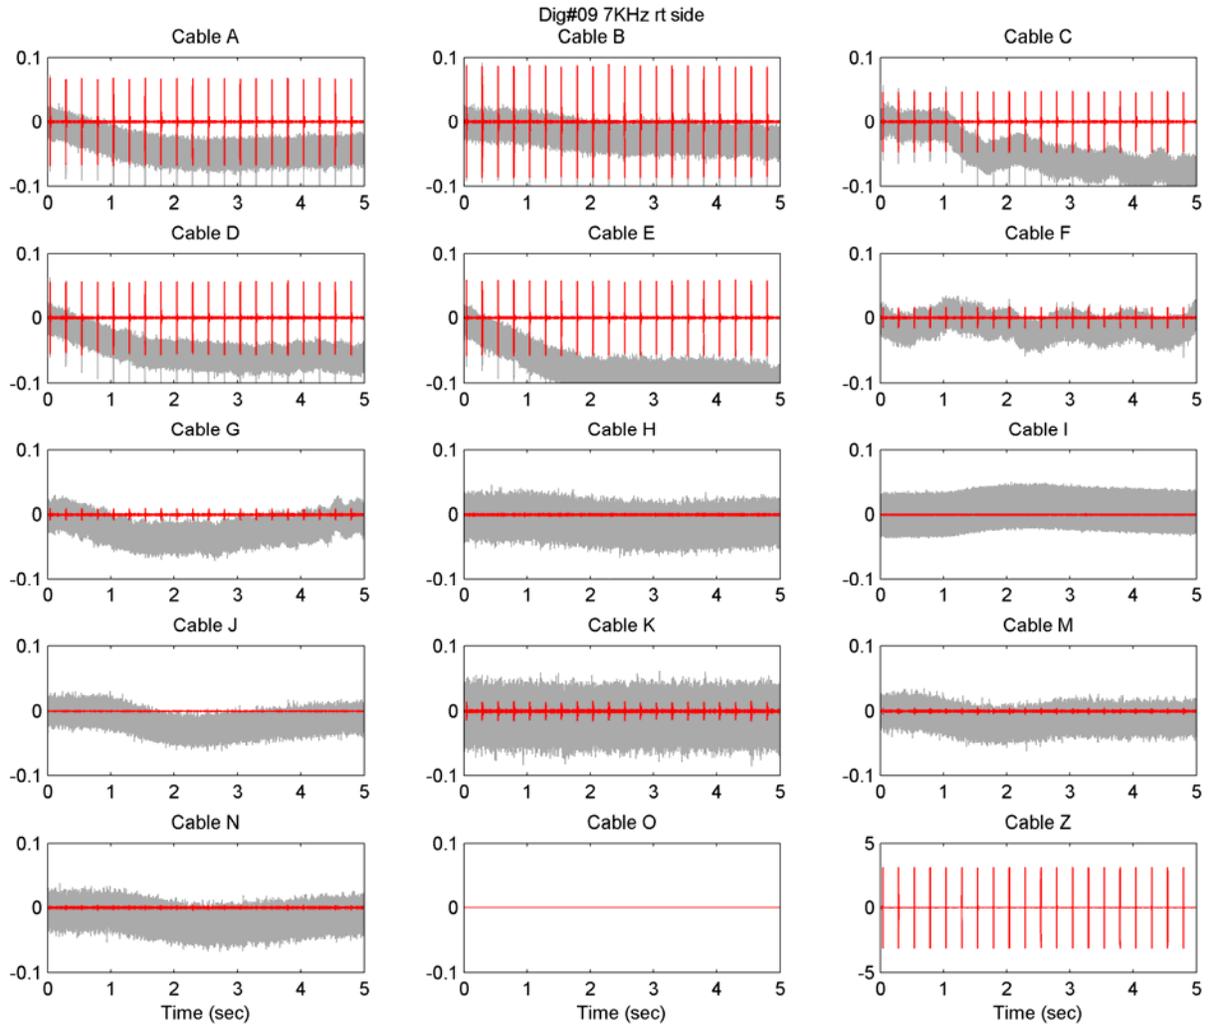

**Fig. 3. Overview of acoustic data collected during the experiment with the common dolphin carcass at NSW Carderock Division on 4 February 2009 with the ITC-1032 spherical transducer on the right side of the carcass and transmit signal centered at 7 kHz. The total data collection time is 5 s; the pulse repetition frequency is 4 Hz. The total signal, including background noise, is shown in gray. The signal resulting from digital bandpass filtering with bandwidth equal to 10% of the center frequency is shown in red. Cables A, B, C, D, E, and G are connected to external sensors. Implanted sensors are connected to Cable F for the epaxial muscle near the dorsal fin, Cable H for the left lung, Cable I for the external right lung, Cable J in the rectal abdomen, Cable K for the melon, Cable M for the left lung, Cable N for the right lung, and Cable O along the right ear. Credit: Y.-T. Lin, M. Hastings, K. Rye, K. Foote.**